FAST 250 PUMP
PRO PLUS

UR FOG FOG STORM

Fogging system with patented **PUMP** and **"LAYER"** heating **TECHNOLOGIES**

Weight of the fogging machine	around 16 Kg
Weight with packaging	around 17 Kg
Units on one pallet (100×120 cm)	24
Dimension of the machine	L 27,0 x W 21,5 x H 43,5 cm
Dimension of the packaging	L 38,0 x W 26,0 x H 53,0 cm
Color	white
Working time without mains power	around 2 hours
Heating time from cold	around 90 minutes
Vertical mounting	yes
Horizontal mounting	yes
Usb port for computer monitoring	yes
Nozzle tamper	yes
Serial interface RS232 with UR FOG Standard protocol	yes
Lan Connection : Active Cloud	opzional

Fog emission and saturation:

up to 1500 m³ in 30 seconds
(500 m³ visibility less than 1 m)

A powerful and fast fogging system, ideal to protect small and medium areas like shops, homes, banks and generally all professional applications where a top security technology is needed.

It is arranged to an easy wall installation and it has a lower compartment to equip boards or accessories if needed.

Heating system "Layer"	yes
Coverage in a single shot (visibility more than 1,5 m)	up to **750** m³
Coverage in a single shot (visibility less than 1 m)	up to **250** m³
Max seconds of fog emission	30 sec
Max fog emitted with full fog bag	1700 m³
Number of bag	1
Fog tank capacity	1 x 1000 ml
Shooting specification	programmable in seconds
Bag included	1

ELECTRICAL SPECIFICATIONS

Mains power	230 V or 120 V
Average power consumption	42 W
2 Ah 12V back up battery (not included)	yes
Pir sensor validation input	yes
Shot confirmation output	yes
Power supply	yes

INSTALLATION

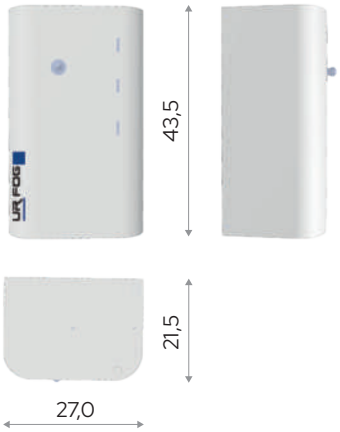

FOG FLUID CERTIFIED

Complies with european CE

Meets EUROPEAN Standard

UR FOG S.r.l. Via Toscana 38 - 10099 San Mauro T.se (Torino) - Italy - Phone: +39 011 0133037 **sales1@urfog.com** | **support@urfog.com** | **www.urfog.com**