PRODUCT SPEC SHEET

12 or 24v DC Power Supply Unit

12 or 24vdc power supply offering 4 or 2 amps of power

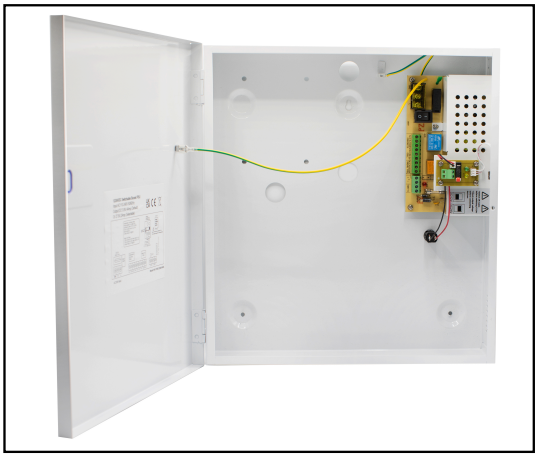

FEATURES

Mains Input: 100~240Vac - 50~60Hz
Output on 12v mode: 13.2~14.0vdc (13.8vdc nominal) 4A max
Output on 24v mode: 27.0~28.0vdc (27.6vdc nominal) 2A max
Battery Output on 12v mode: 10.5~12.4vdc
Battery Output on 24v mode: 21.0~24.7vdc
Tamper: Front and Rear
Panel Indicators: Mains and Fault
Number of Outputs: 1
Additional outputs include mains and independent relays
Protection: Over-current, Over-load, Over-charge, Over-discharge
Main Fuse: F3A
Charge Current: 0.7A max
Charger Fuse: 0.5a PTC
Typical Battery Capacity: 2 x 12v / 7Ah max (batteries not included)

UT-PSU12-24V4-2A-1

Warranty: 3 Years

For more information contact your ADI salesperson or visit us at www.adiglobal.com

Rev: Feb 24

12/24V DC Power Supply Unit

PART SKU # UT-PSU12-24V4-2A-1

SKU PART#	**UT-PSU12-24V4-2A-1**
UPC	**840049310919**
HEIGHT	**365mm**
WIDTH	**330mm**
DEPTH	**85mm**
WEIGHT	**3.5kg**

Each PSU includes:
Fuses 1 x 8a, 1 x 4a, 1 x 3a, 1x 2a
PG11 Gland x 1
M20 Rubber Grommets x 2
Plastic Sticky Grommets x 4
Battery Jumper Lead x 1

12/24VDC Switchable Boxed PSU
Input:AC110-240V 50/60Hz
Output:DC13.8V,4Amp (Default)
Or 27.6V,2Amp (Selectable)

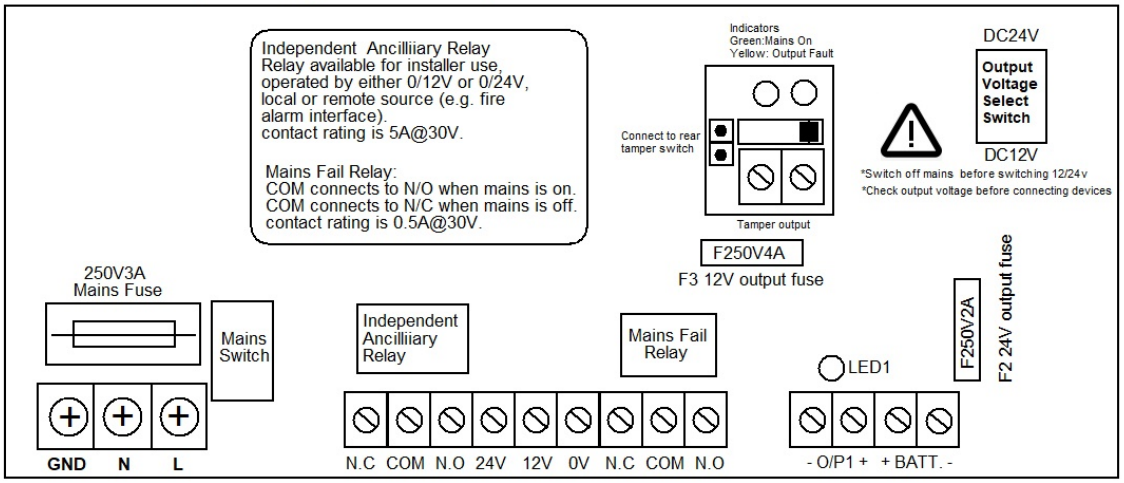

AC230V Input

Rev: Feb 24